## **SIEMENS**

Data sheet 3RW4037-1BB14



SIRIUS soft starter S2 63 A, 30 kW/400 V, 40 °C 200-480 V AC, 110-230 V AC/DC Screw terminals

| General technical data   |    |                          |
|--|----|--------------------------|
| product brand name   |    | SIRIUS                   |
| product designation  |    | Soft starter             |
| product feature  |    |                          |
| <ul> <li>integrated bypass contact system</li> </ul>   |    | Yes                      |
| • thyristors   |    | Yes                      |
| product function   |    |                          |
| <ul> <li>intrinsic device protection</li> </ul>  |    | Yes                      |
| <ul> <li>motor overload protection</li> </ul>  |    | Yes                      |
| <ul> <li>evaluation of thermistor motor protection</li> </ul>  |    | No                       |
| external reset   |    | Yes                      |
| <ul> <li>adjustable current limitation</li> </ul>  |    | Yes                      |
| • inside-delta circuit   |    | No                       |
| product component motor brake output   |    | No                       |
| insulation voltage rated value   | V  | 600                      |
| degree of pollution  |    | 3, acc. to IEC 60947-4-2 |
| blocking voltage of the thyristor maximum  | V  | 1 600                    |
| reference code according to EN 61346-2   |    | Q                        |
| reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750                     |    | G                        |
| Power Electronics  |    |                          |
| operational current  |    |                          |
| <ul> <li>at 40 °C rated value</li> </ul>   | А  | 63                       |
| <ul> <li>at 50 °C rated value</li> </ul>   | А  | 58                       |
| at 60 °C rated value   | А  | 53                       |
| yielded mechanical performance for 3-phase motors  |    |                          |
| • at 230 V   |    |                          |
| <ul> <li>at standard circuit at 40 °C rated value</li> </ul>   | kW | 18.5                     |
| • at 400 V   |    |                          |
| <ul> <li>at standard circuit at 40 °C rated value</li> </ul>   | kW | 30                       |
| yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value | hp | 15                       |
| operating frequency rated value  | Hz | 50 60                    |
| relative negative tolerance of the operating frequency   | %  | -10                      |
| relative positive tolerance of the operating frequency   | %  | 10                       |
| operating voltage at standard circuit rated value  | V  | 200 480                  |
| relative negative tolerance of the operating voltage at standard circuit                                       | %  | -15                      |
| relative positive tolerance of the operating voltage at standard circuit                                       | %  | 10                       |
| minimum load [%]   | %  | 20                       |
|  |    |                          |

|  | _  |   |
|--|----|---|
| adjustable motor current for motor overload protection minimum rated value                                     | Α  | 26  |
| continuous operating current [% of le] at 40 °C  | %  | 115   |
| power loss [W] at operational current at 40 °C during operation typical  | W  | 12  |
| Control circuit/ Control   |    |   |
| type of voltage of the control supply voltage  |    | AC/DC   |
| control supply voltage frequency 1 rated value   | Hz | 50  |
| control supply voltage frequency 2 rated value   | Hz | 60  |
| relative negative tolerance of the control supply voltage frequency  | %  | -10   |
| relative positive tolerance of the control supply voltage frequency  | %  | 10  |
| control supply voltage 1 at AC at 50 Hz  | V  | 110 230   |
| control supply voltage 1 at AC at 60 Hz  | V  | 110 230   |
| relative negative tolerance of the control supply voltage at AC at 50 Hz                                       | %  | -15   |
| relative positive tolerance of the control supply voltage at AC at 50 Hz                                       | %  | 10  |
| relative negative tolerance of the control supply voltage at AC at 60 Hz                                       | %  | -15   |
| relative positive tolerance of the control supply voltage at AC at 60 Hz                                       | %  | 10  |
| control supply voltage 1 at DC   | V  | 110 230   |
| relative negative tolerance of the control supply voltage at DC  | %  | -15   |
| relative positive tolerance of the control supply voltage at DC  | %  | 10  |
| display version for fault signal   |    | red   |
| Mechanical data  |    |   |
| size of engine control device  |    | S2  |
| width  | mm | 55  |
| height   | mm | 160   |
| depth  | mm | 170   |
| fastening method   |    | screw and snap-on mounting  |
| mounting position  |    | With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t |
| required spacing with side-by-side mounting  |    |   |
| • upwards  | mm | 60  |
| at the side  | mm | 30  |
| • downwards  | mm | 40  |
| wire length maximum  | m  | 300   |
| number of poles for main current circuit   |    | 3   |
| Connections/ Terminals   |    |   |
| type of electrical connection  |    |   |
| for main current circuit   |    | screw-type terminals  |
|  |    | **  |
| for auxiliary and control circuit  number of NC contacts for auxiliary contacts                                |    | screw-type terminals  |
| number of NC contacts for auxiliary contacts   |    | 0   |
| number of NO contacts for auxiliary contacts   |    | 2   |
| number of CO contacts for auxiliary contacts   |    | 1   |
| type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point |    | 0.445.40  |
| • solid  |    | 2x (1.5 16 mm²)   |
| finely stranded with core end processing   |    | 0.75 25 mm <sup>2</sup>   |
| • stranded   |    | 0.75 35 mm²   |
| type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point  |    |   |
| • solid  |    | 2x (1.5 16 mm²)   |
| <ul><li>finely stranded with core end processing</li><li>stranded</li></ul>                                    |    | 1.5 25 mm <sup>2</sup><br>1.5 35 mm <sup>2</sup>  |
| type of connectable conductor cross-sections for main contacts for box terminal using both clamping points     |    |   |
| • solid  |    | 2x (1.5 16 mm²)   |

| <ul> <li>finely stranded with core end processing</li> </ul>                                   |    | 2x (1.5 16 mm²)   |
|--|----|---|
| <ul><li>stranded</li></ul>   |    | 2x (1.5 25 mm²)   |
| type of connectable conductor cross-sections for AWG cables for main contacts for box terminal |    |   |
| <ul> <li>using the back clamping point</li> </ul>  |    | 16 2  |
| <ul> <li>using the front clamping point</li> </ul>   |    | 18 2  |
| using both clamping points   |    | 2x (16 2)   |
| type of connectable conductor cross-sections for auxiliary contacts                            |    |   |
| • solid  |    | 2x (0.5 2.5 mm²)  |
| <ul> <li>finely stranded with core end processing</li> </ul>                                   |    | 2x (0.5 1.5 mm²)  |
| type of connectable conductor cross-sections for AWG cables                                    |    |   |
| <ul> <li>for auxiliary contacts</li> </ul>   |    | 2x (20 14)  |
| <ul> <li>for auxiliary contacts finely stranded with core end processing</li> </ul>            |    | 2x (20 16)  |
| Ambient conditions   |    |   |
| installation altitude at height above sea level  | m  | 5 000   |
| environmental category   |    |   |
| <ul> <li>during transport according to IEC 60721</li> </ul>                                    |    | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)   |
| <ul> <li>during storage according to IEC 60721</li> </ul>                                      |    | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4       |
| during operation according to IEC 60721  |    | 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| ambient temperature  |    |   |
| <ul> <li>during operation</li> </ul>   | °C | -25 +60   |
| during storage   | °C | -40 +80   |
| derating temperature   | °C | 40  |
| protection class IP on the front according to IEC 60529  |    | IP20  |
| touch protection on the front according to IEC 60529   |    | finger-safe, for vertical contact from the front  |
| JL/CSA ratings   |    |   |
| yielded mechanical performance [hp] for 3-phase AC motor                                       |    |   |
| • at 220/230 V   |    |   |
| — at standard circuit at 50 °C rated value   | hp | 20  |
| • at 460/480 V   |    |   |
| <ul> <li>— at standard circuit at 50 °C rated value</li> </ul>                                 | hp | 40  |
| contact rating of auxiliary contacts according to UL   |    | B300 / R300   |
| Approvals Certificates   |    |   |
| General Product Approval   |    |   |

## General Product Approval

Confirmation











EMV For use in hazardous locations Test Certificates Marine / Shipping



<u>KC</u>



Special Test Certificate

Type Test Certificates/Test Report



Marine / Shipping other Railway Environment





Confirmation

Special Test Certificate

Confirmation



Environment

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)


Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4037-1BB14


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4037-1BB14


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW4037-1BB14&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW4037-1BB14&lang=en</a>

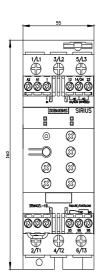

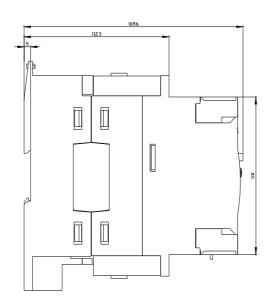



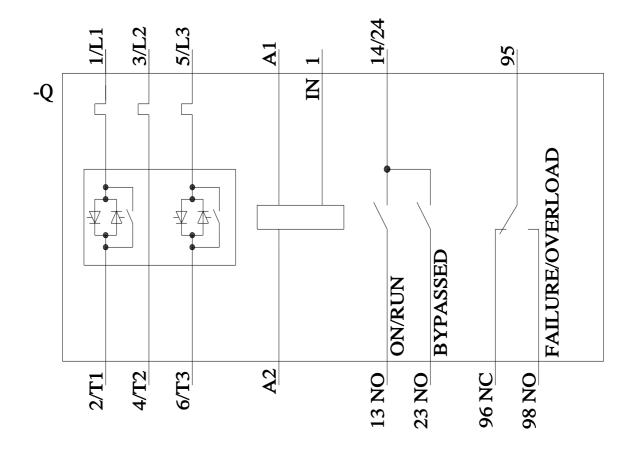

last modified: 6/28/2024 🖸